


1Ux2U FRONT-ENDS & RECTIFIERS

Up to 650 Watts with PFC and Integral Hot Swap Provision

FEATURES

- Front-End or Rectifier Versions
- Includes Isolated 5V, 100mA Standby Output
- Fan Speed Varies with Load & Temp.
- Low Fan Noise at Nominal Load
- Hot-Swap Operation
- Individual AC Inputs
- Dual A/B DC Outputs
- 12, 24 or 48 VDC Outputs
- Class B Conducted EMI
- DC Good LED
- I²C Serial Data Bus Option
- Up to 11.2 Watts/Cubic Inch
- 1U x 2U Profile: 1.6 x 3.3 Inches
- Single, Hot-Swappable Connector
- Staged Pin Engagement
- ORing Diode on Output
- 19- or 23"-Inch Rack Mounting
- Up to 2,200W Total Output
- Active Current Sharing
- Universal 85 to 264VAC Input
- Control & Monitoring Features

Sigma Series

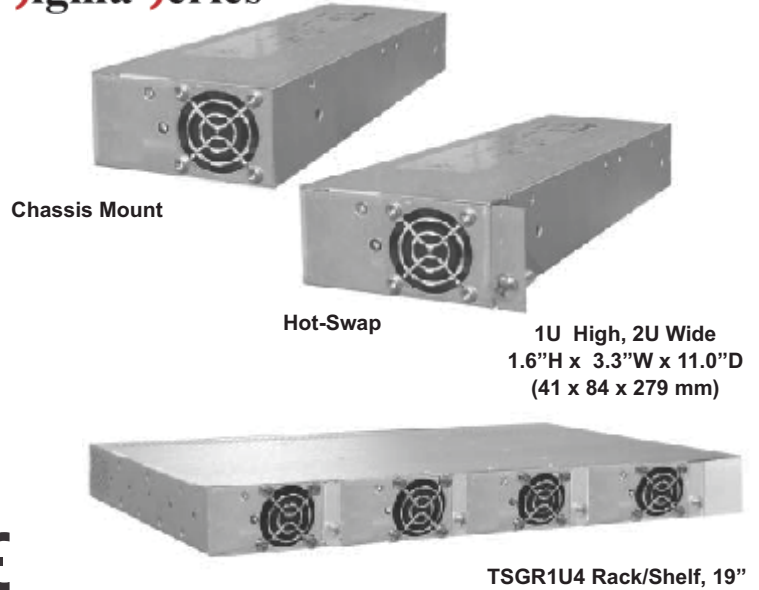

TWO-YEAR WARRANTY
Patent Protected

STANDARD MODELS

Delete "T" prefix to model no. for chassis mount version.

OUTPUT VOLTAGE	OUTPUT CURRENT	MAX. OUTPUT POWER	INPUT VOLTAGE	INPUT CURRENT 120V / 240V	MODEL NUMBER
54.4VDC	12.0A	653W	85-264VAC	6.5A / 3.2A	RSJ48/12
	10.1A	550W		5.4A / 2.7A	RSG48/10
	07.4A	400W		4.0A / 2.0A	RSF48/7
48.0VDC	13.5A	650W	85-264VAC	6.4A / 3.2A	TSJ7000
	11.5A	550W		5.5A / 2.7A	TSG7000
	8.3A	400W		5.5A / 2.7A	TSF7000
27.2VDC	18.4A	500W	85-264VAC	5.0A / 2.5A	RSG24/18
	12.9A	350W		3.5A / 1.7A	RSF24/13
24.0VDC	20.8A	500W	85-264VAC	4.9A / 2.5A	TSG5000
	14.7A	350W		3.5A / 1.7A	TSF5000
13.6VDC	33.0A	450W	85-264VAC	4.4A / 2.2A	RSG12/33
	22.1A	300W		3.0A / 1.5A	RSF12/22
12.0VDC	37.5A	450W	85-264VAC	4.5A / 2.2A	TSG3000
	25.0A	300W		3.0A / 1.5A	TSF3000

NOTE: The table does not show the independent 5V, 100mA standby output which is standard on all models.

CODE	OPTION
-Z	I ² C Serial Data Bus

- NOTES:**
1. Add Option Code as suffix to model no. of module.
 2. In the case of RSF/RSG/RSJ, only for use with DSC1000 and in Gravitas X75.

SAFETY STANDARDS
<ul style="list-style-type: none"> UL60950-1 CSA22.2, No. 60950-1 EN60950-1

19 - 23"- INCH RACK / SHELVES

MAX. NO. MODULES	MAX. POWER	MAX. CURRENT	OUTPUT DC BUS	AC INPUTS	AC INLETS	MODEL NUMBER
4	2,200W	150A	SINGLE	INDIVIDUAL	4-C14	TSGR1U4A
4	2,200W	150A	DUALA/B	INDIVIDUALA/B	2A/2B-C14	TSGR1U4D

1U x 2U FRONT ENDS/RECTIFIERS

Typical at Nominal 115/230VAC Line, Full Load and 25°C Unless Otherwise Noted.

OUTPUT SPECIFICATIONS

Total Output Power, Continuous, Max	300-650 Watts
Voltage Adjustment Range, Min.	±5%
Total Regulation ¹ ,	2.0%
Total Regulation, Standby Supply	5.0%
Ripple & Noise, Pk-Pk ²	1%
Holdup Time	10mS
Dynamic Response ³	300µS
Temperature Coefficient	±0.02%/°C
Minimum Load	0A
Overload Protection	Auto Recovery
Overvoltage Protection	Latched Shutdown
Remote Sense	Up to 0.25V Per Wire
Current Share	±10% Full Load Rating
Standby Output	+5V, 100mA
DC Power Good Signal	Logic Low
AC Power Fail Signal	Logic High
Inhibit	Logic Low
Enable	Logic Low
Overtmp. Warning	Logic High

INPUT SPECIFICATIONS

Input Voltage Range	85-264VAC
Power Factor	0.99
Input Frequency	47-63Hz
Inrush Current Limiting	30A Peak
Harmonic Distortion	EN61000-3-2
Input Protection	Internal Fuse, 10A
Input Current (Module)	See Models Table

GENERAL SPECIFICATIONS

Efficiency ⁴	85-90% at Full Load
Switching Frequency, PFC Converter	48-110kHz
Output Converter	275kHz Nominal
Conducted EMI	EN55022 Curve B FCC20780 pt 15J Curve B
Isolation, Class I, Min. ⁵	
Input-Output	3000VAC
Input-Ground	1500VAC
Output-Ground	50VDC
Input Immunity, Conducted	
Fast Transients, Line-Line	±2kV (EN61000-4-4 Level 3)
Surges, Line-Line	±2kV (EN61000-4-5 Level 3)
Surges, Line-Ground	±4kV (EN61000-4-5 Level 4)
MTBF (Bellcore)	200,000 Hours
Safety Standards	EN60950, UL160950, CSA22.2 No.60950

ENVIRONMENTAL SPECIFICATIONS



Operating Temperature	-20°C to 70°C Ambient
Derating	2.5% / °C, 50°C to 70°C
Storage Temperature	-40°C to +85°C
Cooling	Integral Ball Bearing Fan

PHYSICAL SPECIFICATIONS

Case Material	Aluminum
Dimensions, Inches(mm)	1.6 H x 3.3 W x 11.0 D (40.6 x 83.8 x 279.4)
Weight	2.10 lbs. (0.95 kg.)

- NOTES:**
- No load to full load, including line regulation and load regulation.
 - 20MHz bandwidth. Measure with 0.1µF ceramic and 10µF tantalum capacitors in parallel across the output.
 - <4% deviation recovering to within 1% for 25% load change.
 - Typical efficiency is at low end of range for 12V output and at high end of range for 48V output.
 - Input-output isolation figure is for isolation components only. 100% production Hipot tested.

BACK VIEW
CONNECTOR: POSITRONICS PCIB24W9M400A1
MATE: PCIB24W9F400A1

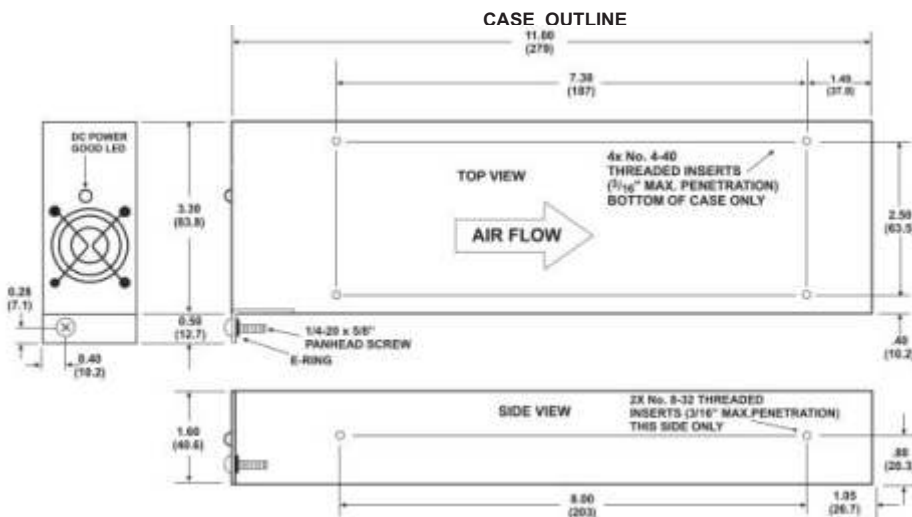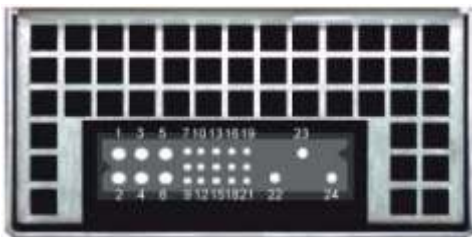

NOTE: SF, SG and SJ models do not have bracket and panhead screw.




PIN CONNECTIONS			
PIN	FUNCTION	PIN	FUNCTION
1	+V Out	13	Module Present
2	+V Out	14	GA1
3	- V Out	15	AC Power Fail
4	- V Out	16	V Trim
5	+ Sense	17	Overtmp. Warning
6	- Sense	18	Current Share
7	Enable	19	Current Monitor
8	GA2	20	+5V Standby
9	GA0	21	DC Power Good
10	Inhibit	22	Chassis Ground
11	SDA	23	AC Line
12	SCL	24	AC Neutral

NOTES: For unit to operate, pin 7 must be at logic LO or shorted to pin 6. For proper operation the following pins must be connected together: + V Out (pins 1&2); -V Out pins (3&4). Pins 8, 9, 11, 12 & 14 are I²C signals when that option is present. The +5V standby return is to -Sense (pin 6). All signals are referenced to -Sense (pin 6).

MATING INTERFACE BOARD
Order Kit Number 009-3901-0000

ALL DIMENSIONS IN INCHES (mm).
All specifications subject to change without notice.

SPECIFICATIONS, TSGR1U4 RACKS/SHELVES, 19-INCH

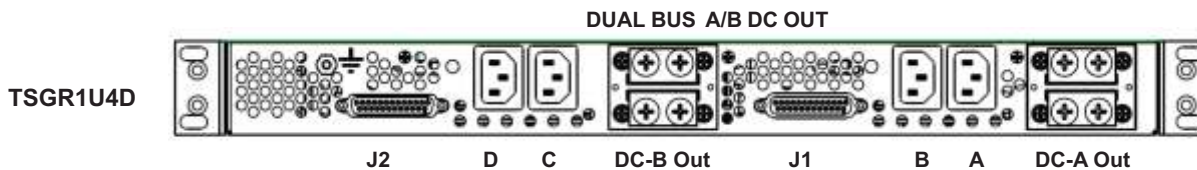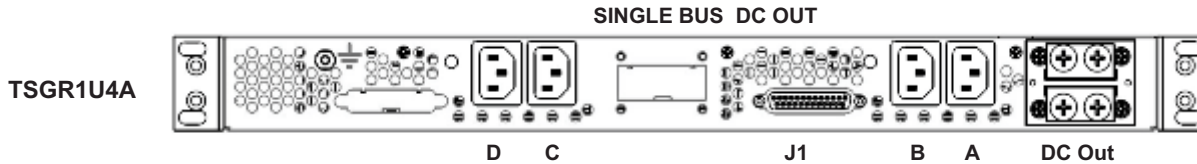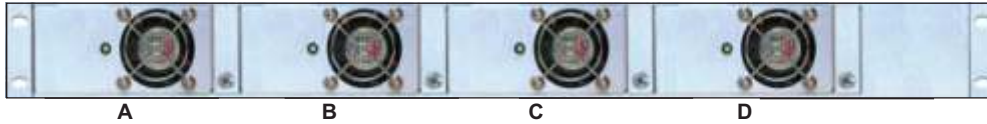


NOTES:
RACK/SHELF DEPTH IS 13.88 INCHES (353 MM). THERE ARE PLASTIC SAFETY COVERS OVER THE DC OUTPUT BUS BARS.


MAXIMUM RATED OUTPUT FOR 4 MODULES

MODULES	NON-REDUNDANT	3+1 REDUNDANT
RSG12/33	13.6VDC @ 132.0A 1800W	13.6VDC @ 99.0A 1350W
RSG24/18	27.2VDC @ 73.6A 2000W	27.2VDC @ 55.2A 1500W
RSJ48/12	54.4VDC @ 48.0A 2611W	54.4VDC @ 36.0A 1958W
TSG3000	12.0VDC @ 150.0A 1800W	12.0VDC @ 112.5A 1350W
TSG5000	24.0VDC @ 83.2A 2000W	24.0VDC @ 62.4A 1500W
TSJ7000	48.0VDC @ 54.0A 2611W	48.0VDC @ 40.8A 1958W

CONNECTIONS

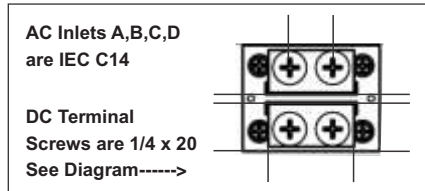


SINGLE DC OUTPUT BUS



Standard 25-Pin Subminiature D Connector

DUAL DC OUTPUT BUSES



Standard 25-Pin Subminiature D Connector























J1 SIGNAL CONNECTOR			
PIN	FUNCTION	PIN	FUNCTION
1	Inhibit	14	AC Power Fail - A
2	N.C.	15	DC Power Good - A
3	Overtemp. Warn. - A	16	AC Power Fail - B
4	Overtemp. Warn. - B	17	DC Power Good - B
5	Overtemp. Warn. - C	18	AC Power Fail - C
6	Overtemp. Warn. - D	19	DC Power Good - C
7	V Adjust - D	20	AC Power Fail - D
8	+5V Standby	21	DC Power Good - D
9	SDA	22	-Sense
10	Current Share	23	-Sense
11	+Sense	24	V Adjust - A
12	V Adjust - B	25	V Adjust - C
13	SCL		

J1 or J2 SIGNAL CONNECTORS			
PIN	FUNCTION	PIN	FUNCTION
1	Inhibit	14	AC Power Fail - A or C
2	N.C.	15	DC Power Good - A or C
3	Overtemp. Warn.- A or C	16	AC Power Fail - B or D
4	Overtemp. Warn.- B or D	17	DC Power Good - B or D
5	—	18	—
6	—	19	—
7	—	20	—
8	+5V Standby	21	—
9	SDA	22	-Sense
10	Current Share	23	-Sense
11	+Sense	24	V Adjust - A or C
12	V Adjust - B or D	25	—
13	SCL		

Notes:

- Standby return is connected to -Sense lead. Current rating of +5V standby is 100mA. All signals are referenced to -Sense lead.
- For rack/shelf "A" all four module DC outputs are connected in parallel. For the "D" version, module A and B outputs are paralleled and module C and D outputs are paralleled. Module A & B signals go to J1; module C & D signals go to J2.
- All racks/shelves come with universal mounting brackets for 19- or 23-inch rack mounting.
- For details on the I²C function (option Z), contact the factory. I²C signals are on J1 & J2 pins 9 & 13. |

ALARM & COMM. ADAPTERS, AC CORDS & CABLES

RELAY ALARM ADAPTOR		Part #: 009-1005-0000	PDF	NOTE
	Plugs directly into the 25 way D-Type signal connector J1 (J2) and converts DC good signal for each module to a Form-C volts-free relay contact output. The module allows daisy chaining of parallel connected shelves for share bus and remote sense.		 Relay Alarm.pdf	
SNMP ALARM		Part #: 009-1006-0000	PDF	NOTE
	Plugs directly into the 25 way D-Type signal connector J1 (J2). Monitors DC Good signal of each power module. Plugs directly into the 25 way D-Type signal connector J1 (J2). Monitors DC Good signal of each power module. When an alarm occurs or clears a built-in processor sends an SNMP alarm trap to the monitoring host and can send an email message. Allows daisy chaining of parallel connected shelves for share bus and remote sense connections. Allows daisy chaining of parallel connected shelves for share bus and remote sense connections.		 SNMP Adapter Alarm.pdf	MIB Table and Setup Manual @ SNMP Setup
I2C COMM ADAPTOR		Part #: 009-1001-0000	PDF	NOTE
	Plugs directly into the 25 way D-Type signal connector J1 (J2) to provide connection of the I2C serial bus to the DSC1000 digital controller		 See Manual @ DSC1000	Modules MUST have -Z option
MODULE EVALUATION BOARD		Part #: 009-3901-0000	PDF	NOTE
	Plugs directly into the Sigma module connector to provide industrial connections for testing and evaluation. Provides AC in and DC out plus alarm connections. 2LEDS: AC good, DC good.		 See Manual @ Sigma	Page 11 fig. 5
MATING CONNECTOR KIT		Part #: 775-1449-0000	PDF	NOTE
Positronic mating connector for custom chassis design.				
AC LINE CORDS 120V 15A		Part #: 364-1412-0000	NEMA 5-15	IEC-C13
One cord per power module for TSGR1U4A or D shelf. Cord length: 6ft (1.83M)				
AC LINE CORDS 240V 15A		Part #: 364-1414-0000	NEMA 6-15	IEC-C13
One cord per power module for TSGR1U4A or D shelf. Cord length: 6ft (1.83M)				
AC LINE CORDS 120 / 240V 15A		Part #: 364-1421-0000	ROJ-LEADS	IEC-C13
One cord per power module for TSGR1U4A or D shelf. Cord length: 6ft (1.83M) REQUIRES CUSTOMER SUPPLIED PLUG				
DC CABLE KIT 1-1 LUG 30"		Part #: 775-1497-1130	Start Lug	End Lug
Pair of Black / Red #4AWG copper cable (600V 125A) 30" with lug terminations and heat shrink. Hole size 0.25", tongue width 0.55".				
DC CABLE KIT 1-2 LUG 30"		Part #: 775-1497-1230	Start Lug	End Lug
Pair of Black / Red #4AWG copper cable (600V 125A) 30" with lug terminations and heat shrink. Hole size 0.25", tongue w = 0.55", spacing 0.63"				
DC CABLE KIT 2-2 LUG 30"		Part #: 775-1497-2230	Start Lug	End Lug
One pair Black / Red #4AWG copper cable (600V 125A) 30" with lug terminations and heat shrink. Hole size 0.25", tongue width 0.55", spacing 0.63"				
DC CABLE KIT 1-1 LUG 84"		Part #: 775-1497-1184	Start Lug	End Lug
One pair Black / Red #4AWG copper cable (600V 125A) 30" with lug terminations and heat shrink. Hole size 0.25", tongue width 0.55"				
DC CABLE KIT 1-2 LUG 84"		Part #: 775-1497-1284	Start Lug	End Lug
One pair Black / Red #4AWG copper cable (600V 125A) 30" with lug terminations and heat shrink. Hole size 0.25", tongue width 0.55", spacing 0.63"			