


CFM20

S E R I E S

20 WATT OPEN FRAME AC-DC MODULES

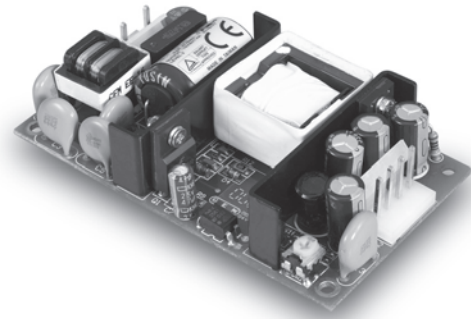

Features

- Universal Input Range 85-264VAC
- Efficiency to 83%
- Industry Standard Pin Out
- Meets EN55022 Class B
- Continuous Short Circuit Protection
- PCB Mountable Type is available

MODEL	OUTPUT VOLTAGE	MAX. LOAD	MIN. LOAD	RIPPLE & NOISE	VOLTAGE ACCURACY	LINE REGULATION	LOAD REGULATION	%EFF.
CFM2001S	5 V	4400mA	0A	1%	± 1%	± 0.5%	± 1%	75% Typ.
CFM2002S	12 V	1800mA	0A	1%	± 1%	± 0.5%	± 1%	81% Typ.
CFM2003S	15 V	1400mA	0A	1%	± 1%	± 0.5%	± 1%	83% Typ.
CFM2005S	24 V	920mA	0A	1%	± 1%	± 0.5%	± 1%	83% Typ.
CFM2007S	3.3 V	4400mA	0A	50mV	± 1%	± 0.5%	± 1%	68% Typ.
CFM2009S	9 V	2450mA	0A	1%	± 1%	± 0.5%	± 1%	79% Typ.

