

115 Watts





SRW-115 SERIES

Features

- Universal 85-264 VAC Input
- Compact 4.25" X 7" X 1.25" Size
- Class B Emissions Per EN 55022
- Over 150,000 Hours MTBF
- Open Frame or Optional Chassis and Cover
- 2 Year Warranty
- EN 60950 ITE Certification



SAFETY SPECIFICATIONS

| | | |
|---|---|--|
| General | Protection Class: | I |
| | Overvoltage Category: | II |
| | Pollution Degree: | 2 |
|  | Underwriters Laboratories File E137708 | UL 1950 Third Edition |
|  | UL Recognition Mark For Canada File E137708 | CAN/CSA-C22.2 No. 950-M95 |
|  | TUV | EN 60950/A11:1997 |
|  | | Low Voltage Directive |
| | | CB Report per IEC 950 (1991) Second Edition, A1, A2, and all national deviations |

MODEL LISTING

| MODEL | OUTPUT 1 | OUTPUT 2 | OUTPUT 3 | OUTPUT 4 |
|------------------|-----------|-----------|----------|------------|
| SRW-115-4001 | +5V/12A | -5V/4A | +12V/4A | -12V/2A |
| SRW-115-4002 | +5V/12A | +24V/1A | +12V/4A | -12V/2A |
| SRW-115-4003 | +5V/12A | -5V/4A | +15V/3A | -15V/2A |
| SRW-115-4004 | +5V/12A | +24V/1A | +15V/3A | -15V/2A |
| SRW-115-4005 | +5V/12A | +12V/1A | +24V/3A | -12V/1A |
| SRW-115-4006 | +5V/12A | +12V/3A | +15V/2A | -15V/2A |
| SRW-115-4007 (4) | +5V/12A | +12V/2.5A | +24V/2A | -5V/1A |
| SRW-115-4008 (4) | +24V/2A | +5V/3A | +5V/2A | -24V/2A |
| SRW-115-4011 | +5V/5A | +15V/1A | +24V/5A | -15V/1A |
| SRW-115-4013 | +5V/13A | +5V/5A | +12V/3A | -5V/3A |
| SRW-115-4012 (4) | +5V/5A | +12V/1A | +24V/3A | -12V/1A |
| SRW-115-4014 | +3.3V/12A | +5V/4A | +15V/3A | -15V/2A |
| SRW-115-4015 | +3.3V/12A | +5V/4A | +12V/4A | -12V/2A |
| SRW-115-4016 (5) | +5.2V/12A | +12V/4A | -12V/2A | -2V/9A |
| SRW-115-4017 | 5V/8A | 19V/1A | 19V/2A | 54.5V/1.5A |
| SRW-115-3001 | +5V/12A | | +12V/4A | -12V/2A |
| SRW-115-3002 | +5V/12A | | +15V/4A | -15V/2A |
| SRW-115-3003 | +5V/12A | | +24V/3A | -12V/1A |
| SRW-115-3004 (5) | +5V/12A | +24V/1A | +12V/6A | |
| SRW-115-3005 (5) | +15V/3A | +15V/2A | +24V/2A | |
| SRW-115-2001 | +5V/12A | | +24V/3A | |
| SRW-115-2002 | +12V/5A | | | -12V/5A |
| SRW-115-2003 | +15V/5A | | | -15V/5A |
| SRW-115-2004 | +24V/2.5A | | | -24V/2.5A |
| SRW-115-2005 | +5V/12A | | +15V/5A | |
| SRW-115-2006 | +5V/12A | | +12V/5A | |
| SRW-115-2007 | +17V/3.4A | | | -17V/3.4A |
| SRW-115-2008 | +9.25V/6A | | | -9.25V/6A |
| SRW-115-2010 | +7.5V/10A | | | -7.5V/6A |
| SRW-115-2011 (4) | +28V/2A | | | -28V/2A |
| SRW-115-2012 | +12V/8A | | | 12V/2A |

All specifications are maximum at 25°C unless otherwise stated and are subject to change without notice.

OUTPUT SPECIFICATIONS

| | | |
|---|--|--|
| Total Output Power | 115W | |
| Output Voltage Centering | Output 1: ±1% Output 2: ±5% Output 3: ±5% Output 4: ±5% | (All outputs at 50% rated load) |
| Source Regulation | Outputs 1-4: 0.5% | |
| Load Regulation | Output 1: 1% (10-100% Load Change) Output 2: 5% (10-100% Load Change) Output 3: 5% (10-100% Load Change) Output 4: 5% (10-100% Load Change) | |
| Cross Regulation | Output 2: 5.0% Output 3: 5.0% Output 4: 5.0% | (Output 1 Load Varied 50-100%) |
| Output Voltage Adjust Span Resolution | Output 1: 95% To 105% | 1% |
| Output Noise Source Freq. Switching Freq. Total (20MHz) | Outputs 1-4: 0.5% Outputs 1-4: 1% Outputs 1-4: 1% | (Output under test at 100% rated load) |
| Hold Up Time | 16mS Min, 115W Output 120V Input | |
| Start Up Time | 1 Second | |

INPUT SPECIFICATIONS

| | | |
|--|--|--|
| Source Voltage | 85 - 264 Volts Continuous | |
| Frequency Range | 47-63 Hz | |
| Source Current True RMS Peak Inrush | 3.5A at 85V Input 40A | |
| Efficiency | .72-.80 (Varies by model) | |
| Turn On Overshoot | None | |
| Transient Response Voltage Deviation Recovery Time Load Change | Outputs 1-4 5% 2mS 50% To 100% | |
| Output Overvoltage Protection (Optional) | Output 1: 110-150% | |
| Output Overpower Protection | 110% min., outputs 1-4, Outputs cycle on/off, auto recovery | |

ENVIRONMENTAL SPECIFICATIONS

| | | |
|-------------------------------------|---|--|
| Ambient Operating Temperature Range | 0° C to +50° C | |
| Storage Temperature Range | -40° C To +85° C | |
| Temperature Coefficient | Outputs 1-4: 0.02%/°C | |
| Shock | Transit drop per MIL-STD-810E Method 516.4 Procedure IV | |
| Vibration | MIL-STD-810E, Method 514.4 Category 1 | |
| Conducted Emissions | EN 55022 Class B | |


GENERAL SPECIFICATIONS

| | | |
|------------------------------|---|--|
| Dielectric Strength | 4242 VDC, Primary to Secondary, 1 Sec. 2121 VDC, Primary to Ground, 1 Sec. 500 VDC, Secondary to Ground, 1 Sec. | |
| Power Fail Signal (Optional) | Logic low with input power failure, 2 mS minimum prior to output 1 drooping 1% | |
| Mean-Time Between Failures | 150,000 Hours min., MIL-HDBK-217F, 25° C, GB | |
| Weight | 2.25 Lbs. Chassis and cover 1.30 Lbs. Open frame | |

NOTES:

1. Consult factory for alternate output configurations.
2. Consult factory for positive, negative, or floating outputs.
3. Specify optional overvoltage protection, power fail signal, chassis or cover when ordering.
4. UL, CUL, only.
5. TUV only.

Open Frame

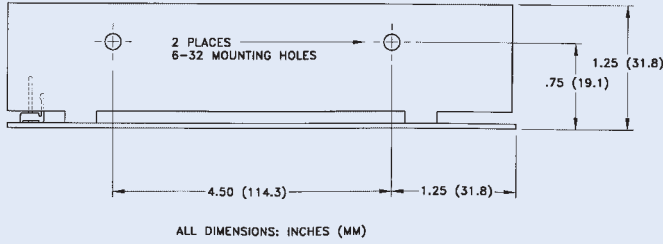

AC Input and Ground Connector TB1:


- .156 inch friction lock header mates with Molex 09-50-3051 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.

DC Output Connector TB2:



- .156 inch friction lock header mates with Molex 09-50-3101 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.

Power Fail Connectors:

- PF: Power fail signal
- TB2-7,8: Power fail signal return

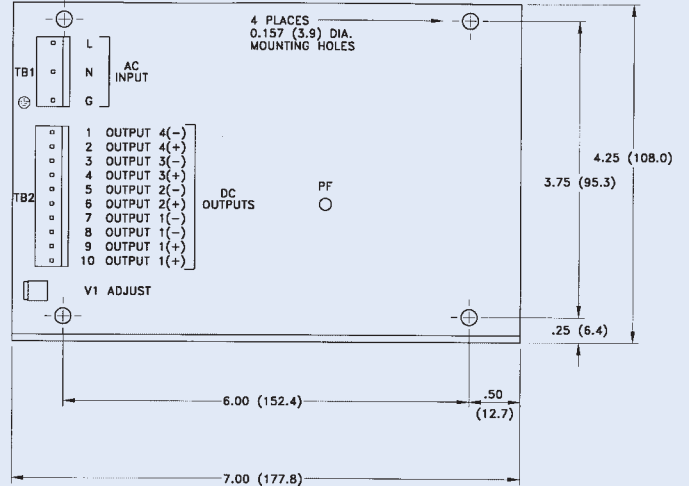

Optional Chassis & Cover

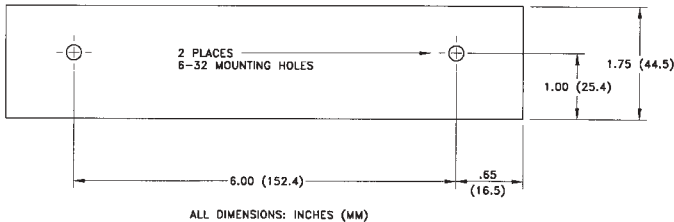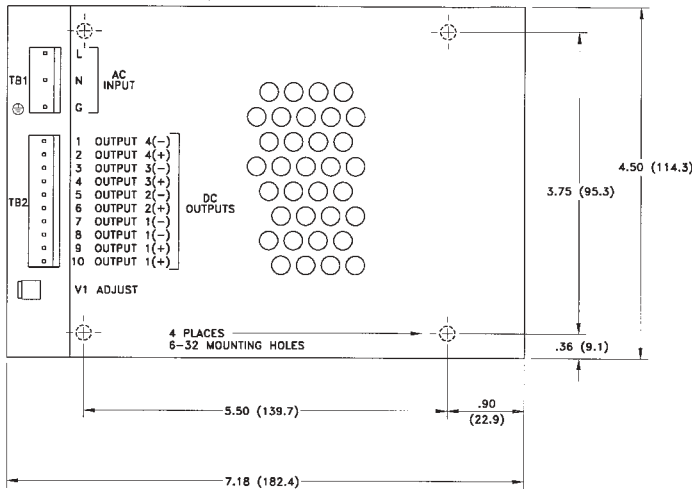

APPLICATIONS INFORMATION

1. Maximum screw penetration into mounting holes is .25 inch.
2. Each output can deliver its rated load but total output power must not exceed 115 watts.
3. A minimum load of 20% is required on output one to insure proper regulation of remaining outputs.
4. Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
5. This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
6. This product is intended for use as a professionally installed component within information technology equipment.



Optional chassis/cover shown